(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 21 May 2004 (21.05.2004)

PCT

(10) International Publication Number WO 2004/042920 A2

(51) International Patent Classification7:

H03H 7/01

(21) International Application Number:

PCT/IB2003/004840

(22) International Filing Date: 30 October 2003 (30.10.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 02102553.1

8 November 2002 (08.11.2002)

- (71) Applicant (for all designated States except US): KONIN-KLLIKE PHILIPS ELECTRONICS N.V. [NL/NL]: Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): KWONG, Kam, Choon [MY/DE]; Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).
- (74) Agent: VOLMER, Georg; Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).


- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PII, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GII, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, MI., MR, NE, SN, TD, TG).

Published:

without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A FLAT INTERMEDIATE IF FILTER FOR TUNERS

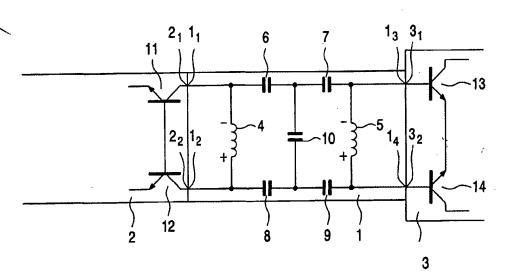

(57) Abstract: The invention describes an intermediate frequency input circuit (1), which is coupled between output nodes of a frequency mixing circuit (2) and input nodes of an intermediate frequency amplifier circuit (3). The intermediate frequency circuit (1) comprises a first inductor (4), a first capacitor (6) and a third capacitor (8), which are in resonance with a lower intermediate frequency and a second inductor (5), a second capacitor (7), a fourth capacitor (8), which are in resonance with an upper intermediate frequency. These resonant frequencies are coupled by a fifth capacitor (10) in order to obtain a flat graph of a frequency characteristic of the intermediate frequency input circuit 1.